




X (1 : 5)

cable flange with:
8 x M22
4 x M16

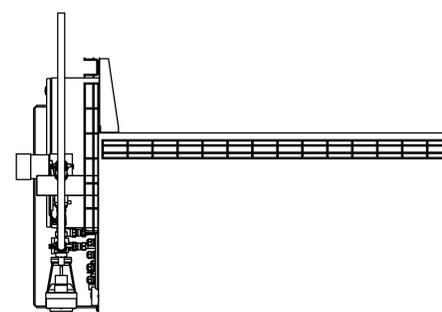

A-A (1 : 10)

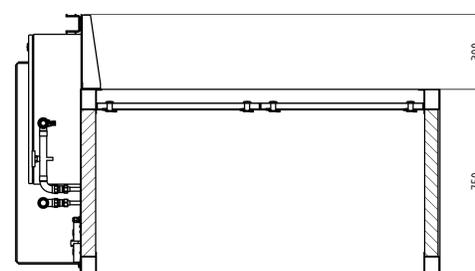

Heat register with control unit.
Cooling capacity of register: 26.7 kW
Fan capacity of register (EC fan): 2 x 6,500 = 13,000 m³/h, 2 x 4.5 kW

Heating medium
Heating medium temperature: 70/90°C
Air outlet: 40°C
Air inlet: 34°C

Stainless steel filter:
Inner and outer expanded metal mesh V2A,
outer layer: 2x 16 mm diamond pattern as cover mesh
inner layer: 6x 6 mm inside.
Corners riveted.

Mesh ducts:
Manufacturer Pflitsch
75-5 x 55 V2A

Housing:
Wall V2A
Joints sealed on the inside

Fin spacing greater than 3 mm

The registers consist of copper pipe with pressed-on aluminum lamellas (epoxy resin-coated)

Control unit included in delivery, consisting of pump /3-way valve/check valve/pipes/flanges

Pump:
Mains connection: 1~230V/50 Hz +/-10%
Protection class: IP 55

1x A4 control unit diagram with labeling.

Flow direction of the medium in the control unit marked with clearly visible arrows on the pipes.

